

AMPSEAL CONNECTOR SERIES

FOR INDUSTRIAL & COMMERCIAL TRANSPORTATION

TERMINALS & CONNECTORS





WE GO TO EXTREMES TO MAKE SURE **EVERY CONNECTION COUNTS**

TE Connectivity (TE) Industrial & Commercial Transportation (ICT) is a reliable provider of solutions for harsh environmental conditions. With a focus on employee expertise and durable products, we deliver the solutions and support our customers can count on.

Years ago, tractors, construction equipment, trucks, and boats had simple electrical systems that might have included electrical starting and a basic lighting package. Today, ECUs, joysticks, fuel-efficient engines, LED lights, and CAN systems are standard equipment. The need to protect sensitive electrical systems from vibration, moisture, dust, dirt, salt, and airborne particles has never been greater. TE Industrial & Commercial Transportation is a leader in supporting today’s increasingly complex and sophisticated equipment and applications.

Our comprehensive line of products includes an unparalleled portfolio of rugged sensors, terminals, connectors, relays, and hybrid electric mobility solutions. These solutions are designed to withstand the harshest environmental conditions and to help vehicles operate safer, cleaner, and smarter.

Our solutions adapt to virtually any **harsh environment application**, including:



Motors and Gearboxes



ABS/EBS Brake Units



Telematics Units



Sensors



Wire-To-Wire Coupling at the Chassis



Infotainment Applications



**2,500+
EMPLOYEES**



**10,000+
CUSTOMERS**



**20,000+
DIFFERENT PARTS**

MARKETS WE SERVE



ON-HIGHWAY



OFF-HIGHWAY



**RECREATIONAL
TRANSPORTATION**


ONLINE RESOURCES



TE.COM/ICT



LITERATURE

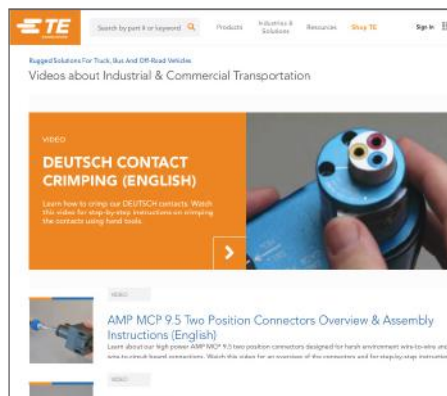

VIDEOS



TE SOLUTION CENTER

You can rely on TE Connectivity's helpful Solution Center team to provide answers to your general and technical questions.

Connect with our Solution Center staff at:
te.com/support

AMPSEAL Connector Series

for Industrial & Commercial Transportation



AMPSEAL Connector Series

Our AMPSEAL connectors are designed for cable-to-board harsh environment applications. Environmentally sealed for rugged reliability, these connectors are available in cable plugs and PCB mount headers engineered to withstand extreme temperature and moisture, including high-temperature underhood applications.

The pre-assembled receptacle housing connector features built-in contact sealing and an integral interfacial seal that protects mated connectors. Rated to IP69K, AMPSEAL connectors are offered in arrangements from 8 to 35 positions. Available accessories include tool-less backshells, sealing plugs, and Connector Position Assurance (CPA).

AMPSEAL Connector Series

for Industrial & Commercial Transportation



AMPSEAL Connector Series	6 - 7
AMPSEAL Housings & Headers	8 - 10
AMPSEAL Accessories	11 - 12
AMPSEAL Contacts	13 - 14
Application Tooling	15 - 16

AMPSEAL Connector Series

for Industrial & Commercial Transportation

BENEFITS

- Design flexibility with connectors and contacts supporting wire sizes from 16 to 24 AWG
- Secure positive contact seating through secondary contact locking and lanceless contacts.
- Protect from dust, water, and overspray with up to IP69K rugged sealing capabilities.
- Reduce tangling during storage and handling thanks to lanceless receptacle contacts.
- Reduce wire strain and ease assembly with tool-less backshells available for all housing sizes.
- Minimize mismatching and misidentification with different connector colors and mechanical polarized keyings.
- Connection security through CPA accessory.



KEY INDUSTRIES



Truck



Bus



Construction



Agriculture



Special Vehicles



Marine



Two-Wheeler



Forklift



Power Generation

APPLICATIONS



PCB Connection



Wire-to-Board



Power Distribution

AMPSEAL Connector Series

for Industrial & Commercial Transportation

PRODUCT DOCUMENTATION

Additional product documentation is available for assistance with AMPSEAL products.

The following documentation may be helpful:

108-1329	Product Specification, AMPSEAL Connectors
114-16016	Application Specification, AMPSEAL Connectors

PERFORMANCE SPECIFICATIONS

Current	Up to 17 A gold, up to 8 A tin
Temperature	Operating at temperatures: -40°C to +125°C for gold plated -40°C to +105°C for tin plated
Mating Durability	See note. Mate and unmate specimens for 10 cycles at maximum rate of 600 cycles per hour.
Insulation Resistance	100 megohms minimum. TE Specification 109-28-4. Test between adjacent contacts of mated specimens.
IP Rating	IP67/IP69K with backshells
Random Vibration	See note. TE Specification 109-21-7, Condition G, except 10-500Hz frequency range. Subject mated specimens to 10Gs for 8 hours each plane.
Voltage	250 V AC
Flammability	UL 94-V0-rated material


Note: Shall meet visual requirements, show no physical damage and shall meet requirements of additional tests as specified in Test Sequence in Figure 3 of TE product document 108-1329.

MATERIAL SPECIFICATIONS


Wire Seal	Silicone rubber
Mating Seal	Silicone rubber
Cover	PBT
Housing	PBT
Locking Wedge	PBT

AMPSEAL Housings & Headers


CONFIGURATIONS




8 Positions
8 size 1.3 mm



14 Positions
14 size 1.3 mm



23 Positions
23 size 1.3 mm



35 Positions
35 size 1.3 mm

DIMENSIONS



Cavity	AMPSEAL Receptacle Housing			AMPSEAL Header			
	Overall Length A	Overall Height B	Overall Width C	Overall Length 180° D	Overall Height E	Overall Width F	Overall Length 90° G
	Inch (mm)						
8	1.32 (33.6)	1.36 (34.6)	1.08 (27.4)	1.35 (34.3)	1.26 (32.1)	1.61 (40.8)	1.49 (37.9)
14	1.32 (33.6)	1.36 (34.6)	1.39 (35.4)	1.35 (34.3)	1.26 (32.1)	1.92 (48.8)	1.49 (37.9)
23	1.32 (33.6)	1.36 (34.6)	1.87 (47.4)	1.35 (34.25)	1.26 (32.1)	2.39 (60.8)	1.49 (37.9)
35	1.32 (33.6)	1.36 (34.6)	2.50 (63.4)	1.35 (34.25)	1.26 (32.1)	3.03 (76.9)	1.49 (37.9)

Dimensions are for reference only

AMPSEAL Housings & Headers

ORDERING INFORMATION - RECEPTACLE HOUSINGS

Position	Keyed Housing Color	Receptacle Housing	
		16-20 AWG (1.5 - 0.5 mm ²)	20-24 AWG (0.5 - 0.2 mm ²)
8	Black	776286-1	2371882-1
8	Natural	776286-2	2371882-2
14	Black	776273-1	2371883-1
14	Natural	776273-2	2371883-2
14	Gray	776273-4	2371883-4
14	Blue	776273-5	2371883-5
23	Black	770680-1	2371884-1
23	Natural	770680-2	2371884-2
23	Gray	770680-4	2371884-4
23	Blue	770680-5	2371884-5
35	Black	776164-1	2371885-1
35	Natural	776164-2	2371885-2
35	Gray	776164-4	2371885-4
35	Blue	776164-5	2371885-5
35	Orange	776164-6	2371885-6

STICK HEADERS

AMPSEAL stick headers are low profile pin carriers available for overmolding and integration into modules.



Position	Contact Finish	Stick Header
8	Tin plated	2301063-1
8	Gold plated	2301063-2
23	Tin plated	1740313-1
23	Gold plated	2120833-1
35	Tin plated	1103599-1

AMPSEAL Housings & Headers

for Industrial & Commercial Transportation

AMPSEAL Housings & Headers

ORDERING INFORMATION - HEADERS

Position	Keyed Housing Color	Contact Finish	Right-Angle PCB Header		Vertical PCB Header	
			Without Seal	With Seal	Without Seal	With Seal
8	Black	Tin plated	776279-1	776280-1	776275-1	776276-1
8	Black	Gold plated	1-776279-1	1-776280-1	1-776275-1	1-776276-1
8	Natural	Tin plated	776279-2	776280-2	776275-2	776276-2
8	Natural	Gold plated	1-776279-2	1-776280-2	1-776275-2	1-776276-2
14	Black	Tin plated	776266-1	776267-1	776261-1	776262-1
14	Black	Gold plated	1-776266-1	1-776267-1	1-776261-1	1-776262-1
14	Natural	Tin plated	776266-2	776267-2	776261-2	776262-2
14	Natural	Gold plated	1-776266-2	1-776267-2	1-776261-2	1-776262-2
14	Gray	Tin plated	776266-4	776267-4	776261-4	776262-4
14	Gray	Gold plated	1-776266-4	1-776267-4	1-776261-4	1-776262-4
14	Blue	Tin plated	776266-5	776267-5	776261-5	776262-5
14	Blue	Gold plated	1-776266-5	1-776267-5	1-776261-5	1-776262-5
23	Black	Tin plated	770669-1	776087-1	776200-1	776228-1
23	Black	Gold plated	1-770669-1	1-776087-1	1-776200-1	1-776228-1
23	Natural	Tin plated	770669-2	776087-2	776200-2	776228-2
23	Natural	Gold plated	1-770669-2	1-776087-2	1-776200-2	1-776228-2
23	Gray	Tin plated	770669-4	776087-4	776200-4	776228-4
23	Gray	Gold plated	1-770669-4	1-776087-4	1-776200-4	1-776228-4
23	Blue	Tin plated	770669-5	776087-5	776200-5	776228-5
23	Blue	Gold plated	1-770669-5	1-776087-5	1-776200-5	1-776228-5
35	Black	Tin plated	776180-1	776163-1	776230-1	776231-1
35	Black	Gold plated	1-776180-1	1-776163-1	1-776230-1	1-776231-1
35	Natural	Tin plated	776180-2	776163-2	776230-2	776231-2
35	Natural	Gold plated	1-776180-2	1-776163-2	1-776230-2	1-776231-2
35	Gray	Tin plated	776180-4	776163-4	776230-4	776231-4
35	Gray	Gold plated	1-776180-4	1-776163-4	1-776230-4	1-776231-4
35	Blue	Tin plated	776180-5	776163-5	776230-5	776231-5
35	Blue	Gold plated	1-776180-5	1-776163-5	1-776230-5	1-776231-5
35	Orange	Gold plated	1-776180-6	1-776163-6	-	1-776231-6

AMPSEAL Accessories

The accessory items available to complement the AMPSEAL connectors are backshells, sealing plugs, and CPA.

BACKSHELLS

AMPSEAL backshells offer a high level of protection and help reduce wire strain. They are made of heavy-duty thermoplastic and provide enhanced aesthetics for AMPSEAL connector applications.



Pos	Part Number	Description
8	2138529-1	Vertical exit with wire relief (a wire tie is recommended around the end of the backshell to aid in securing the halves together)
14	2138530-1	
23	2389806-1	
35	2389807-1	

Note: One half, two halves required per receptacle housing

SEALING PLUGS

Open cavities provide pathways for contaminants to enter the connectors. To maintain seal integrity, any unused cavity that has been pierced must be filled with the appropriate size sealing plug.



Color	Contact Size (mm)	Wire Size AWG (mm ²)	Part Number	Material
White	1.3	16 - 20 (1.5 - 0.5)	770678-1	Nylon
Natural	1.3	20 - 24 (0.5 - 0.2)	776364-1	Nylon

CONNECTOR POSITION ASSURANCE (CPA)

AMPSEAL Connector Position Assurance provides mating assurance and helps prevent accidental unmating of the connector. It can be used with all AMPSEAL receptacle housings.



Color	Part Number	Material
Red	2373965-1	PBT

AMPSEAL Contacts

for Industrial & Commercial Transportation

AMPSEAL Contacts

AMPSEAL connectors commonly use the 1.3 mm three contact beam lanceless stamped & formed contact system.



1.3 MM CONTACT PERFORMANCE SPECIFICATIONS

Durability	
10 cycles (tin & gold)	

Current Rating	
Contact Size (mm)	Max. Current (A)
1.3 (tin)	Up to 8
1.3 (gold)	Up to 17

Contact Retention	
Contact Size (mm)	Max. Load
1.3	Contacts shall not dislodge, applying an axial load of 115 N to contacts in the axial direction with wedgelock in locked position.

Crimp Tensile Strength	
Contact Size (AWG)	Tensile Strength (N)
1.3 mm	
24	50
22	50
20	≥ 80
18	≥ 90
16	≥ 150

AMPSEAL Contacts

for Industrial & Commercial Transportation

AMPSEAL Contacts

1.3 MM STAMPED & FORMED CONTACTS FOR AMPSEAL CONNECTORS

Contact Size (mm)	Wire Size AWG (mm ²)	Insulation Diameter Inch (mm)	Finish	Receptacle Part Numbers			
				Strip Form	Package Quantity	Loose Piece	Package Quantity
1.3	16 - 20 (1.5 - 0.5)	0.067 - 0.106 (1.7 - 2.7)	Pre-tin plated	770520-1	25000	770854-1	5000
1.3	16 - 20 (1.5 - 0.5)	0.067 - 0.106 (1.7 - 2.7)	Selective gold plated	770520-3	25000	770854-3	5000
1.3	20 - 22 (0.5 - 0.3)	0.055 - 0.071 (1.4 - 1.8)	Pre-tin plated	770520-5	25000	/	/
1.3	22 - 24 (0.3 - 0.2)	0.055 - 0.071 (1.4 - 1.8)	Pre-tin plated	770520-6	25000	/	/
1.3	20 - 22 (0.5 - 0.3)	0.055 - 0.071 (1.4 - 1.8)	Selective gold plated	770520-8	25000	/	/
1.3	22 - 24 (0.3 - 0.2)	0.055 - 0.071 (1.4 - 1.8)	Selective gold plated	1-770520-1	25000	/	/

AMPSEAL Wire Sealing, Sealing Plugs, and CPA

The wire sealing range is the recommended outside diameter of the wire insulation required to maintain an environmental seal in the rear connector cavities.

Contact Size (mm)	Wire Size AWG (mm ²)	Standard Seal Inch (mm)
1.3	16 - 20 (1.5 - 0.5)	0.067 - 0.106 (1.7 - 2.7)
1.3	20 - 24 (0.5 - 0.2)	0.055 - 0.71 (1.4 - 1.8)

Application Tooling

for AMPSEAL Connector Series

AMPSEAL CONNECTORS

TOOLING

Tools are specific to each contact style. To create a proper crimp and achieve high performance specifications, contacts must be crimped with the recommended tooling.



HAND TOOLS FOR 1.3 MM CONTACTS



PRO-CRIMPER III



CERTI-CRIMP II

Wire Size AWG (mm ²)	Receptacle Strip Form Part Number	Receptacle Loose Piece Part Number	Hand Tool Part Number	Description
16 - 20 (1.5 - 0.5)	770520-1 770520-3	770854-1 770854-3	58529-1	PRO-CRIMPER III hand tool and die set assembly
16 - 20 (1.5 - 0.5)	770520-1 770520-3	770854-1 770854-3	2217748-1	CERTI-CRIMP II straight action hand tool
20 - 22 (0.5 - 0.3)	770520-8 770520-5	/	2396182-1	CERTI-CRIMP II straight action hand tool
22 - 24 (0.3 - 0.2)	1-770520-1 770520-6	/	2396101-1	CERTI-CRIMP II straight action hand tool

Note: Base PRO-CRIMPER III tool part number with -2 suffix is the part number for the die set, which can be ordered separately.

AUTOMATED TOOLING FOR 1.3 MM CONTACTS



Wire Size AWG (mm ²)	Receptacle Strip Form Part Number	Applicator Part Number	Description
16 - 20 (1.5 - 0.5)	770520-1 770520-3	2151376-1	OCEAN end feed applicator with mechanical feed
16 - 20 (1.5 - 0.5)	770520-1 770520-3	2151376-2	OCEAN end feed applicator with pneumatic feed
20 - 22 (0.5 - 0.3)	770520-8 770520-5	2837821-1	OCEAN end feed applicator with pneumatic feed
22 - 24 (0.3 - 0.2)	1-770520-1 770520-6	2837822-1	OCEAN end feed applicator with pneumatic feed

Note: Applicators with additional feed styles are available; please contact your TE representative.

AMPSEAL CONNECTORS

HOW-TO INSTRUCTIONS

CONTACT INSERTION



Step 1

Grasp crimped contact approximately one inch behind the contact barrel.



Step 2

Check that the wedgelock of the plug assembly is in open position. Align the contact with the applicable cavity.



Step 3

Insert the contact into the connector cavity until there is an audible and tactile click. A slight tug will verify the contact is locked in place.




Step 4

After all the contacts have been inserted, close the wedgelock by simultaneously squeezing locking latches inward and pushing the wedgelock into the housing.

Note: AMPSEAL connector grommet is solid until pierced.

CONTACT REMOVAL

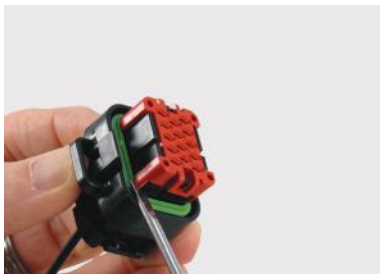

Step 1

Insert the tip of a screwdriver (2-5 mm wide blade) between the edge of the plug assembly housing and one corner of the wedgelock.



Step 2

Gently pry the edge of the wedgelock until it is released from (but not completely removed) the housing. Repeat these steps for the opposite corner of the wedge.



Step 3

Gently pull the wire of the contact to be removed while rotating the wire (a quarter turn each direction) back and forth until the contact is removed from the housing.

AMPSEAL Connector Series

for Industrial & Commercial Transportation

NOTES

A large grid of 20 columns and 30 rows of small dots. Several dots are highlighted in orange, indicating specific data points or markers. The orange dots are located at the following approximate coordinates (row, column): (1, 6), (2, 15), (3, 10), (4, 18), (5, 11), (6, 19), (7, 14), (8, 7), (9, 13), (10, 16), (11, 12), (12, 17), (13, 15), (14, 10), (15, 18), (16, 14), (17, 11), (18, 19), (19, 13), (20, 16), (21, 12), (22, 17), (23, 15), (24, 10), (25, 18), (26, 14), (27, 11), (28, 19), (29, 13), (30, 16).

AMPSEAL Connector Series

for Industrial & Commercial Transportation

NOTES

A large grid of 20 columns and 20 rows of small dots, with several dots highlighted in orange. The orange dots are located at the following coordinates (row, column): (1, 6), (2, 15), (3, 10), (4, 1), (5, 11), (6, 19), (7, 14), (8, 8), (9, 16), (10, 12), (11, 18), (12, 13), (13, 17), (14, 15), (15, 11), (16, 19), (17, 14), (18, 8), (19, 16), (20, 12).

ABOUT TE CONNECTIVITY

TE Connectivity is a global industrial technology leader creating a safer, sustainable, productive, and connected future. Our broad range of connectivity and sensor solutions, proven in the harshest environments, enable advancements in transportation, industrial applications, medical technology, energy, data communications, and the home. With more than 85,000 employees, including over 8,000 engineers, working alongside customers in approximately 140 countries, TE ensures that EVERY CONNECTION COUNTS. Learn more at www.te.com and on LinkedIn, Facebook, WeChat and Twitter.

LET'S CONNECT

We make it easy to connect with our experts and are ready to provide all the support you need. For additional information or product assistance, please contact your field representative or our customer service department. Additional information is also available on the website te.com/ict.

TECHNICAL SUPPORT

www.te.com/support

United States +1 800 522 6752

Germany +49 6151 607 1999

China +86 400 820 6015

Japan +81 44 844 8052

te.com/ict

AMP MCP, AMPSEAL, DEUTSCH, PRO-CRIMPER, CERTI-CRIMP, OCEAN, TE Connectivity, TE, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity Ltd. family of companies.

All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2022 TE Connectivity Corporation. All Rights Reserved.

ict-ampseal-cat-a4-1-1773979-2-en Revision 08-2022

TE Connectivity

4849 Hempstead Station Drive
Kettering, OH 45429
USA